



### **ABOUT US**

Located all across Asia in Thailand, Sri Lanka, Myanmar and Malaysia, Sanieuro Group of Companies specializes in manufacturing and distribution of quality bathroom and kitchen products since 1969.

Our product specialist are always available to advice you and guide you through your next project requirement. Visit our website **sanieuro.com** for more details.

### **Our Brands:**







Brands we carry includes but not limited to the following:




















# **OUR PRESENCE**

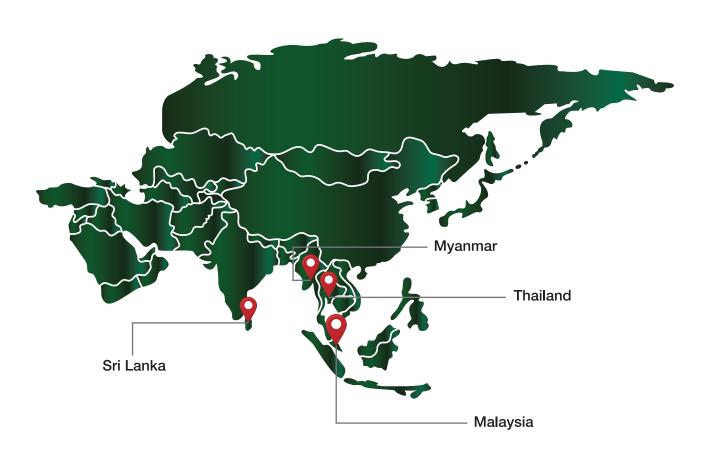



- 02 Reinz Kitchen Tap
- 04 Endeo Heavy Duty Water Dispenser
- 06 Hidrate Drinking Station
- 08 eCompact Multi-Point Tankless Water Heater
- 09 Sigma Cube Storage Water Heater
- 10 Boox Instantaneous Water Heater
- 11 Riio Single Point Instantaneous Water Heater
- 12 Assure Water Purification



# Reinz Kitchen Tap

# Specification -



Model	<b>REINZ</b> Titanium	REINZ 2	<b>REINZ</b> Lite	
Power Rating	2.0 kW	1.3 kW	1.3 kW	
Operating Voltage	220-240 V, 50/60 Hz	220-240 V, 50/60 Hz	220-240 V, 50/60 Hz	
Tank Capacity	2.6 L	2.6 L	2.6 L	
Filter Capacity	23 000 L	23 000 L	23 000 L	
Cups per hour (167 ml/cup)	130 Cups, Up to 98°C	100 Cups, Up to 98°C	80 Cups, Up to 96°C	
Tank Material	Stainless Steel	Stainless Steel	Stainless Steel	_
Heating Element	Titanium	Stainless Steel	Stainless Steel	w
Dimension (W X D X H, mm)	190 X 360 X 340	190 X 360 X 340	190 X 360 X 340	
Safety Child Lock	<b>✓</b>	✓	✓	
Smart Eco Timer Control	<b>✓</b>			_
Filter Change Beeper Reminder	<b>✓</b>	✓	✓	
Hot and Ambient Only	✓	✓	✓	



### Accessories



### Font

- Diameter: 140 mm
- Simple Installation
- Stylish fit for beverage station
- Available in:
  - chromed plated finished or
  - black powder coated

### Тар

- Available in:
  - chromed plated finished or
  - black powder coated



### **Product Features**








SAFE TO USE

SAFE TO DRINK

COST SAVING

SMART CONTROL

HIGH PERFORMANCE



# World-class All-in-One

Water Purification System effective removal: 0.01µ to 0.2µ



### A) Sediment Filter

• Removes dust, sediment and bigger particles.



#### **B) Activated Carbon Block**

 Removes cysts, unpleasant odours, chlorine, chloramine, trihalomethane, VOCs and heavy metals



### **C) Ultrafiltration Membrane**

• Removes 99.99% of bacteria, algae and some viruses while preserving natural minerals.

**Quality Certification** of Our Filter







### **Advance Features**

AUTO ALTITUDE CALIBRATION

FCO SMART CONTROL

TITANIUM HEATING ELEMENT

FILTER CHANGE REMINDER



USER PROGRAMMABLE TIMER



HIGH PERFORMANCE

## **Product Safety & Quality -**



















- A free-standing water dispenser designed for heavy duty usage.
- Comes with 3 water options:

  Cold, ambient and hot to meet all kinds of beverage/ drinking needs.
- Ultra-high capacity filter for high traffic usage.

# Specification -

Model		Endeo S	Endeo X10 Filter
Power (W)	Hot	2000	2000
	Cold	150	150
Tank Material		SS 304	
Body Material		SS 201	SS 201
Water Selection		Hot/Ambient/Chilled	Hot/Ambient/Chilled
Tank Capacity (L)	Hot	10	10
	Ambient	20	20
	Chilled	3	3
Dimension (cm)	Length	48.5 (56cm with water tray)	48.5 (56cm with water tray)
	Depth	42.5	42.5
	Height	132	132
Output	Hot	80°C-98°C	95°C-98°C
		40L/ hr (approx. 195 cups/ hr)	30L/ hr (approx. 130 cups/ hr)
	Cold	4°C-12°C	4°C-12°C
		10L/ hr (approx. 59 cups/ hr)	10L/ hr (approx. 43 cups/ hr)
Filtration		1) Pleated Filter	X10 Filter
		2) Ultra-Filtration Membrane Pre-Filter	
	3) Ultra	aHi Capacity Active Carbon Block with Scale Inhibitor	
Filter Capacity		50 000 L	23 000 L

### Endeo S



### Replacement Filter: (A) Pleated Pre-Filter

- Sediment filter to remove big particles like sands and muds.
- Pleated technology for bigger filtration surface and more effective filtration.
- · Replacement: Every 3-6 months\*



### (B) Ultrafiltration Membrane Pre-Filter

- Ultrafiltration Membrane filter to remove smaller particles up to 0.01 micron.
- 99.99% effective removal of bacteria, algae and some viruses while preserving good mineral.
- Replacement: Every 3-6 months\*



# (C) UltraHi Capacity Active Carbon Block with Scale Inhibitor

- Remove cysts, unpleasant odours, chlorine, chloramine,trihalomethane,VOCs and heavy metals.
- · Reduce the rate of scale formation.
- Replacement: 50,000L or every 3-6 months whichever comes first.
  - \* Depends on varying water quality.

### **Quality Assurance of Assure X10:**












# **Endeo X10 Filter**

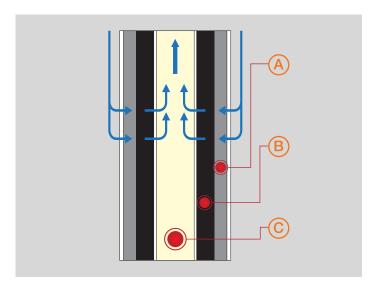



### A) Sediment Filter

• Remove dust, sediment, and bigger particles.



### B) Activated Carbon Block

• Remove cysts, unpleasant odours, chlorine, chloramine, trihalomethane, VOCs and heavy metals.



### C) Ultrafiltration Membrane

 Removes 99.99% of bacteria, algae and some viruses while preserving natural minerals.

### Replacement Filter: Superior All-in-One Filter Assure X10

- Filtration range up to 0.01 micron
  - (a) Sediment
  - (b) Carbon
  - (c) Ultrafiltration Membrane
- Capacity: 23,000L (6,300G)
- Flow Rate: 1.5GPM (5.7LPM)
- Replacement: Every 6 months

# Replacement Filter: Pleated Pre-Filter (Optional)

- Sediment filter to remove big particles like sands and muds.
- Pleated technology for bigger filtration surface and more effective filtration.
- Replacement: Every 3-6 months



### Replacement Filter: Superior All-in-One Filter Assure X10

- Filtration range up to 0.01 micron (a) Sediment
  - (b) Carbon
  - (c) Ultrafiltration Membrane
- Capacity: 23,000L (6,300G)
- Flow Rate: 1.5GPM (5.7LPM)
- · Replacement: Every 6 months

#### **Distributed Territory**


- · Project Only: Malaysia
- Project & Retail: Sri Lanka Myanmar Thailand Cambodia

### Filter Quality Assurance







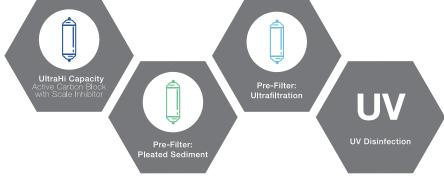

### UltraHi Capacity Active Carbon Block with Scale Inhibitor

- Remove cysts, unpleasant odours, chlorine, chloramine,trihalomethane,VOC and heavy metals.
- Reduce the rate of scale formation.
- Replacement: 50,000L or every 3-6 months whichever comes first.
  - \* Depends on varying water quality.

### **Pre-Filter: Pleated Sediment**


- Sediment filter to remove big particles like sands and muds.
- Pleated technology for bigger filtration surface and more effective filtration.
- Replacement: Every 3-6 months\*

#### **Pre-Filter: Ultrafiltration**

- Ultrafiltration Membrane filter to remove smaller particles up to 0.01 micron.
- 99.99% effective removal of bacteria, algae and some viruses while preserving good mineral.
- Replacement: Every 3-6 months\*

### **UV** Disinfection

- Kills viruses
- Great for thorough disinfection



### **Sediment Filter**

• Remove dust, sediment, and bigger particles.

### **Activated Carbon Block**

• Remove cysts, unpleasant odours, chlorine, chloramine, trihalomethane, VOCs and heavy metals.

### **Ultrafiltration Membrane**

• Removes 99.99% of bacteria, algae and some viruses while preserving natural minerals.

# **Specification**





Model	Dimension (mm)	Font (mm)	Capacity
Hydrate.FA+	367 x 534 x 1375	140	80 000
Hidrate.X	285 x 240 x 1008	140	23 000
Hidrate.C	285 x 240 x 1008	140	23 000
Hidrate.SA	285 x 240 x 1008	140	23 000
Hidrate.A+	285 x 240 x 1008	140	80 000
Hidrate.A	285 x 240 x 1008	140	23 000

# **Product Quality Assurance**

















# **eCompact**

Multi-Point Tankless Water Heater

### **Product Features -**

### Switch to Intrix eCompact today to enjoy the following benefits:

- Standard Hotel Bathroom Facilities with Multi-Point Outlets
- ► Endless Hot Water with Thermelizer Technology
- ► Concealed Installation
- Zero Standby Heat Loss

- No Biological Risks
- Space Saving Compact Design
- Zero Waiting Time
- ► Low Activation Flow Rate

# **Specifications**

	240V	220V	INSTALLATION RECOMMENDATIONS			DIMENSION	
	NOMINAL POWER (W)	NOMINAL POWER (W)	MCB (A)	PVC INSULATED COPPER CABLE SIZE (MM2)	MIXED FLOW RATE AT 380C (LITER PER MINUTE, LPM)	RECOMMENDED APPLICATION	274mm (H)
IHEC-4.5	4500	3781	25	4	6.0	Standard Shower	х
IHEC-6.0	5960	4990	32	4	8.0	Rain Shower	220mm (W) x
IHEC-7.5	7450	6286	40	6	10.0	Rain Shower	95mm (D)
IHEC-9.3	9300	7806	50	10	12.0	Bath Tub	

## Certified and Approved by













# Sigma Cube Storage Water Heater

### Features -

- ► Incoloy 840 Heating Element
- ► Blue Diamond Coating
- Anti Rust & Leak Proof

- Dry Burn Protection
- Pressure Protection
- Earth Leakage Circuit Breaker (ELCB)

### Safety Features



Pressure Relief Valve (PRV)

# Specifications -

Rated Power (220V <sub>ac</sub> )	1.5kW	Rated Temperature	75°C
Rated Voltage	220V - 240V	Water Ingress Protection	IPX4
Rated Current	6.8A	Plumbing Connection	1/2" BSP inlet & outlet
Frequency	50Hz/60Hz	Dimension (mm)	349 X 349 X 276
Min. Start Pressure	0.2Bar (0.02MPa)	Capacity (L)	10
Rated Pressure	8.0Bar (0.8MPa)		* 1 year warranty on other parts.



# Instantaneous Water Heater

### Features and Benefits-



### **ZERO Water Ingress**

Double safety assurance with specially designed inlet tunnel and auto drainage that eliminates the risk of water ingress into the internal of the heater.



### All in One Hydraulic Structure

Simplicity in hydraulic structure design that gives easy installation and worry-free maintenance.



### IPX5 Splash Proof

Designed and built with splash-proof safety standard that protects the internal circuits from water.



#### Earth Leakage Safety Device (ELSD)

Safety device that cuts off both live and neutral line completely in case of electricity leakages to prevent electric shock.



#### **Anti-Scald Safety Device**

Prevents water temperature from reaching scalding level and permanently cuts off power to the heater when temperature reaches abnormal level.



### **Energy & Water Saving**

Saves electricity and water cost as the heater only heats up the water when in use.



### Non Flammable Material Compliance

Self extinguish, non-combustible material for external casing



#### **High Precision Power Selector**

Provides easy and precise control over the water temperature.

### **Technical Specifications -**

Power Rating	3.8kW, 240V a.c. 50Hz / 60Hz
Inlet & Outlet Water Connection	Diameter 15mm (1/2" BSP)
Min Inlet Water Pressure	0.1MPa
Dimensions (L x H x W)	194 x 298 x 90mm
Weight	920g



# Riio

# Single Point Instantaneous Water Heater

# Safety Points-



### 9X Built-in Safety Measures for peace of mind usage:

- 1. Electronic RCD (Residual-Current Device)
  - Once electrocution currents detected, it will cut power off immediately.
- 2. IP25 Splash Proof Compliance
  - Enclosed design to prevent ingress of water and access of hazardous parts with finger and foreign objects.
- 3. Anti-Scald System
  - Cut off power supply if water temperature exceeds hazard limit of 55.
- 4. Non Conductive PVC Hose
  - To prevent current leakage.
- 5. Non-Flammable Heater Tank
  - Made of UL-94-VO material that is self extinguish, non-combustible, superior for prevention of fire.
- 6. Anti-Leak Tank
  - Able to withstand high water pressure in case of sudden surge of water pressure.
- 7. Lightning & Surge Protection
  - Protect against lightning strikes and current leakage.
- 8. Adjustable Pump Speed & Pump Activator
- 9. RCD Test Function

## **Specifications**

•	RIIO.EP	RIIO.E
FlexiConnect for Seamless Connection	✓	✓
DC Silent Shower Pump	✓	
Electronic RCD (Residual Current Device)	✓	✓
IP25 Splash Proof Compliance	✓	✓
Anti-Scald System	✓	✓
Non Conductive PVC Hose	✓	✓
Non Flammable Heater Tank	✓	✓
Anti Leak Tank	✓	~
Lightning & Surge Protection	✓	✓
5 Modes Shower Head	<b>√</b>	1

### Certified and Approved by















# Assure Water Purification





All-in-One Filter includes: Sediment, Carbon & Ultrafiltration Membrane



Removal pores size up to 0.1µ



Space-saving undersink design



Long lifespan water filter lasts up to 1 year



Removes bacteria, E.g. Campylabacter, Salmonella, Shigella, E.coli



Purified water straight from the tap



Filter lifespan: 23,000L



Filter Changing Reminder



Stainless Steel Filter Tap included




#### **Assure SAX 8**

- Space Saving Undersink Design
- Purified Water Straight From The Tap
- Stainless Steel Tap Included
- Capacity: 23,000L



### Assure X10

- Replacement Filter
- Capacity: 23,000L



of Our Filter


### World-class All-in-One







B) Activated Carbon Block



C) Ultrafiltration Membrane
• Removes 99.99% of bacteria, alg









#### SANIEURO SDN BHD

B-LG-1, Connaught Avenue, Jalan 9, Taman Bukit Cheras, 56000, Kuala Lumpur, Malaysia

Tel:+603 9108 2199 Fax: +603 9108 3199 Email: sales@sanieuro.com Web: www.sanieuro.com

#### NOVATEC SANITARYWARE LANKA (PVT) LTD.

No. 9, Chilaw Road, Dalupotha,

Negombo, Sri Lanka

Tel: +94 31 4936843 / 31 4936847

Fax: +94 31 2223535 Email: sales.lk@sanieuro.com /

sales.novateclanka@gmail.com

Web: www.sanieuro.com/lk

### SANIEURO THAI CO., LTD.

343/25-26, Thanon Khlong Lam-Jiag, Nuanchan, Buengkum, Bangkok,

10230, Thailand

Tel: +662 105 3401 / 105 3409-10

Fax: +662 105 3400 Email: sales.th@sanieuro.com Web: www.sanieuro.com/th

#### SANIEURO MYANMAR CO., LTD.

No.12, Room 7, Parami Road, Chaw Dwin Gone, Ma Yan Gone Township,

11061 Yangon, Myanmar.

Tel: +959 450 33 5111 / +09 267 48 1770

Email: sales.mm@sanieuro.com Web: www.sanieuro.com/mm





@sanieuromy



Sanieuro Sdn.Bhd.



sanieuro\_sdn\_bhd

Hashtag: #sanieuro

Website: www.sanieuro.com